


CR14505BL Brief Datasheet

Lithium Manganese Dioxide Battery

1 BASIC SPECIFICATION

(Typical values relative to cells stored for one year or less at +30°Cmax.)

Nominal capacity (at 0.5mA, +23°C) * ¹	1800mAh
Nominal voltage	3.0V
Standard discharge current	0.5mA
Maximum continuous current	10mA
Maximum pulse current * ²	100mA
Operating temperature range * ³	-40°C- +85°C
Storage temperature (recommended)	+30°C Max
Weight	22g

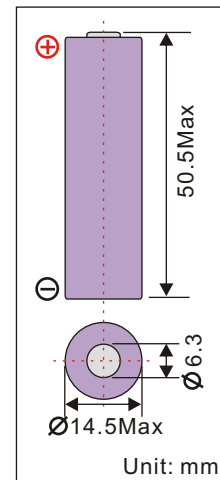


Note:

- *¹ At 0.5mA discharge current to 2.0V cut-off, +23°C . The capacity restored by the cell varies according to current drain, temperature and cut-off.
- *² The readings may vary according to the pulse characteristics, the temperature, and the cell's previous history.
- *³ Operation above ambient temperature range may lead to reduced capacity and lower voltage readings at the beginning of pulses. Consult EEMB.

2 MAIN FEATURES

- Light Weight, High Voltage and High Energy Density
- Excellent Stable Discharge Characteristics and outstanding Temperature Characteristics
- The battery is bobbin type and best suited for long term use with low current
- Excellent Leakage Resistance and excellent Long-term Reliability

3 ELECTRICAL CHARACTERISTICS

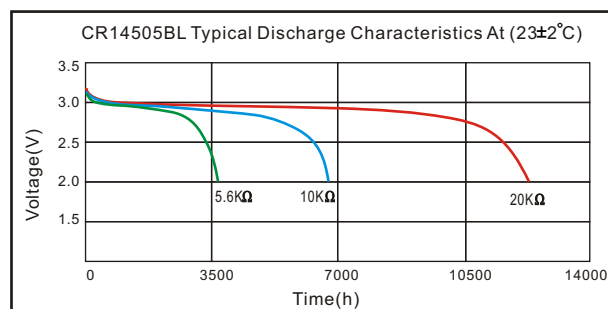

Bobbin Structure Laser-sealing

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.