



## CR17335

Manganese Dioxide  
Lithium Cylindrical Batteries

Dimensions(mm)




### DISCHARGE CHARACTERISTICS

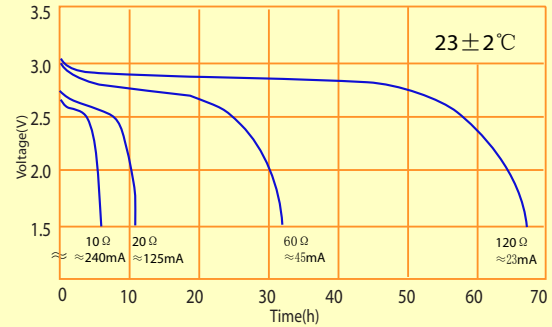

### CHARACTERISTICS (23 ± 2°C)

Nominal capacity 10mA-2.0V	1450mAh
Nominal voltage	3.0V
Max. constant current	1500mA
Max. pulse current	3000mA
Operating temperature	-40°C ~ +85°C
Weight(g)	20.0 g


### TEMPERATURE CHARACTERISTICS

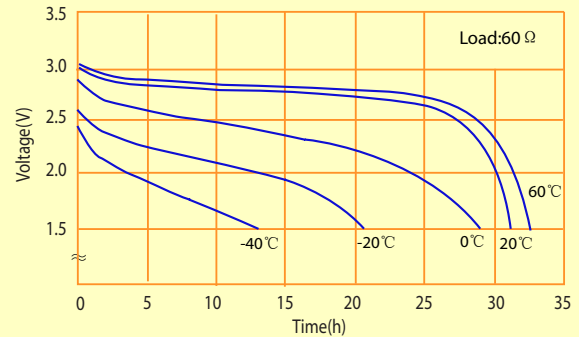

#### WARNING:

- Forbid short-circuit, charge between "+" and "-".
- Forbid over-discharge, fire,
- Finish sealing less more 5 seconds at 200°C~250°C.
- Take out the battery when discharging to cut-off voltage, and embedding it under the ground or jump in the deep water.

### LOAD-CAPACITY CHARACTERISTICS

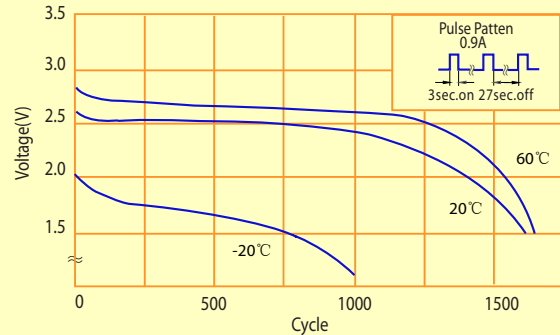

#### EVE BATTERY CO., LTD.

Tel:+86-752-260 1750 +86-752-260 6966 Fax:+86-752-260 6033

<http://www.evebatter.com> Email:sales@evebatter.com

Latest version can be downloaded from EVE website

V0708